


PGS Standard Braids

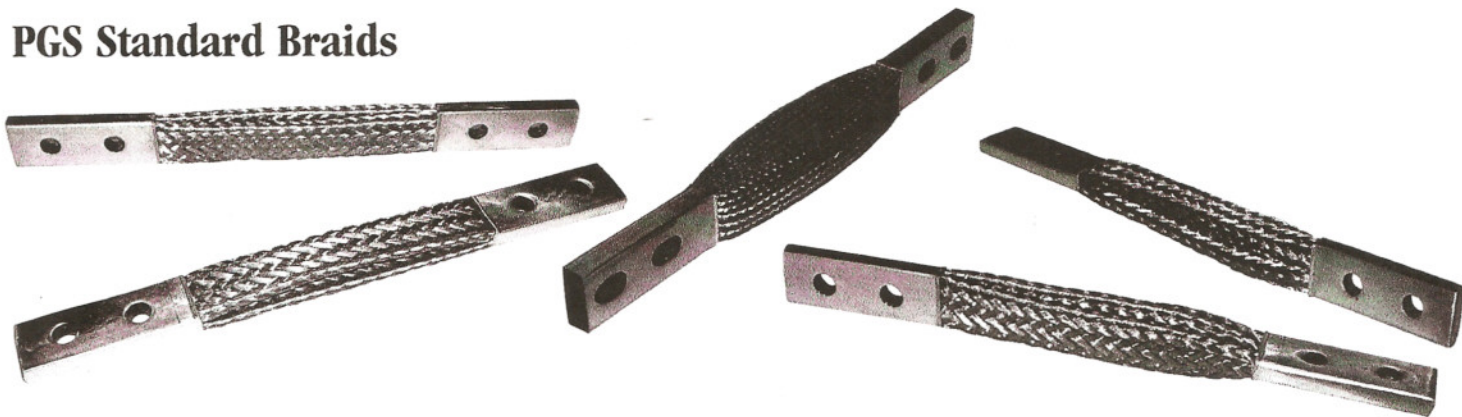

PGS offers a line of standard braids to meet your requirements for expansion joints on buss systems, for equipment misalignment problems or for vibration damping solutions. The braids are supplied with NEMA standard hole patterns. Slotted holes are also available.

PGS Part Number	No. of Braids /assy.	Term. Thick. (+/-1/32)	Term Width	Outdoor Ampere Rating	Indoor Ampere Rating
118075	1	3/16"	3/4"	184	154
221075	2	7/32"	3/4"	275	230
328075	3	9/32"	3/4"	355	296
431075	4	5/16"	3/4"	429	358
118100	1	3/16"	1"	234	195
221100	2	7/32"	1"	342	285
325100	3	1/4"	1"	432	360
431100	4	5/16"	1"	514	429
121100	1	7/32"	1"	296	247
225100	2	1/4"	1"	441	368
334100	3	11/32"	1"	567	473
440100	4	13/32"	1"	684	571
118125	1	3/16"	1 1/4"	307	257
225125	2	1/4"	1 1/4"	452	377
328125	3	9/32"	1 1/4"	572	477
434125	4	11/32"	1 1/4"	681	568
537125	5	3/8"	1 1/4"	784	654
118150	1	3/16"	1 1/2"	385	321
225150	2	1/4"	1 1/2"	558	465
331150	3	5/16"	1 1/2"	699	583
437150	4	3/8"	1 1/2"	826	689
543150	5	7/16"	1 1/2"	943	787
121150	1	7/32"	1 1/2"	390	326
228150	2	9/32"	1 1/2"	577	481
334150	3	11/32"	1 1/2"	736	614
440150	4	13/32"	1 1/2"	883	736
446150	5	15/32"	1 1/2"	1022	852
118200	1	3/16"	2"	543	453
225200	2	1/4"	2"	792	661
331200	3	5/16"	2"	999	834
437200	4	3/8"	2"	1187	990
546200	5	15/32"	2"	1363	1137

***Custom manufactured Braided Flexes can be designed by giving the following information.
Width, Ampacity, Length, Hole Pattern.**